



REVISIONS			
Rev.	Modification	Date	Done By
A	Amended Notes	8/5/2019	NPH
B	Updated Materials	10/14/2022	NPH

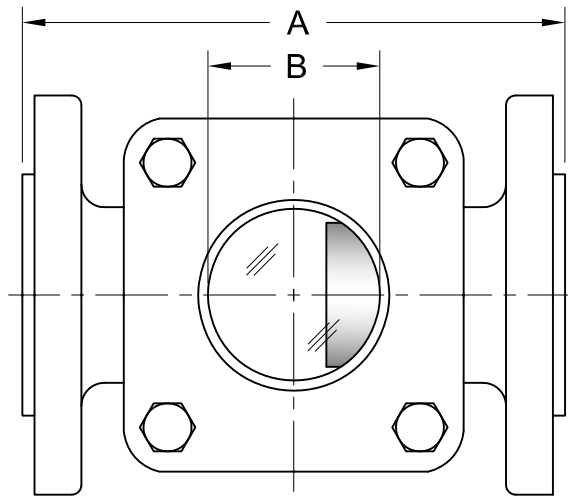

Flow Direction

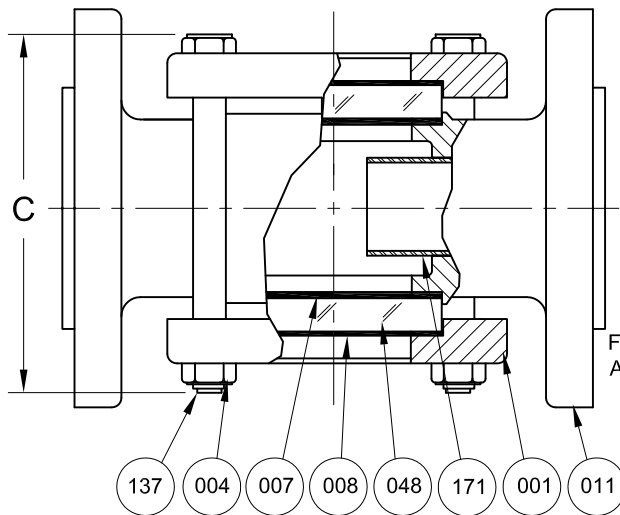

Flange Conn. Per
ASME B16.5 600# RF

**ASME Class 600 Service
Press./Temp. Ratings**
*Limited to Gasket & Glass
Material

Temp. (°F)	Pressure (PSIG)	
	CS	316SS
-20 to 100	1480	1440
150	1420	1340
200	1360	1240
250	1335	1180
300	1310	1120
350	1285	1070
400	1265	1025
450	1235	990
500	1205	955

*Consult Sales for Higher & Lower
Temps.

BILL OF MATERIALS

* - Denotes an Optional, Non-Standard Material

No.	Name of Part	Qty.	Material	Max. Temp. (°F)	Material Grade/Notes	
Wetted	011	1	Electro-Galvanized Zinc Plated Carbon Steel		ASTM A216 WCB	
			316SS		ASTM A351 CF8M	
	007	2	Neoprene	250		
			Gylon®	500	Gylon® 3545	
			*EPDM	250		
			*Viton®	350		
			*Graphite	500		
			*Non Asbestos	500		
			*Buna-N	250		
	048	Lens	2	Tempered Boro.	500	
171	Drip Tube	1	316SS			
Non-Wetted	008	Cushion	2	Non-Asbestos	500	
	001	2	Electo-Galvanized Zinc Plated Carbon Steel		ASTM A516 Gr.70	
			*316SS		ASTM A240	
	137	Var.	Yellow Zinc Plated Steel		ASTM A354-BD	
			*316SS		ASTM A193-B8M-CL2	
	004	Var.	Yellow Zinc Plated Steel		ASTM A194-2H	
*316SS				ASTM A194-8M		
163	Name Plate	1	304SS		Not Pictured (Wired to Unit)	

PRODUCT SPECIFICATIONS

Flange Size	A		B		C ₂		Weight		# of Bolts
	In.	mm.	In.	mm.	In.	mm.	lbs.	kg.	
1/2 & 3/4	6-1/4	159	1	25	5-1/4	133	9-1/2	4.3	4
1	7-1/4	184	1-1/4	32	5-3/4	146	17	7.7	4
1-1/2	7-7/8	200	2	51	5-7/8	149	24	10.9	4
2	9	229	2	51	8-1/8	206	35	15.9	4
2-1/2 & 3	11-3/4	298	3-3/16	81	11-5/8	295	64	29.0	4
4	14-1/4	362	4-1/2	114	14-1/4	362	135	61.2	4
6	23-3/8	594	5-1/2	140	19-1/8	486	260	117.9	12
8	25-1/4	641	5-1/2	140	21-7/16	545	350	158.8	12

Notes:

1. Fused & Dual Glass Options are also Available
2. Standard Bolt Length for "C" Dimension (±1/8")
3. Carbon Steel & 316SS Bodies Conform to NACE MR0175 for Wetted NACE Service
4. For 6" & 8", maximum pressure is 800PSI, maximum temperature is 500°F depending on gasket material

JOHN C ERNST LLC.

www.JOHNERNST.com
21 Gail Ct. Sparta, N.J. USA

Series S16F Sight Flow Indicator - Drip Tube 600# Flanged

Sheet: 1 of 1	Drawn By: WAS	Tolerances, unless otherwise noted Dec.: ± Frac.: ± Ang.: ±	Size: A
Scale: NTS	Approved By GEW		Dim.: Var.
Dwg. No.: SC2.0S16F.05.0.0		Rev.: B	

S16F Series Configuration Choices:

Reference the Series S16F Model Number Matrix on our Website or Inquire with our Sales Team

Gylon® is a Registered Trademark of Garlock Sealing Technologies
Viton® is a Registered Trademark of The Chemours Company