


REVISIONS			
Rev.	Modification	Date	Done By



Flow Direction

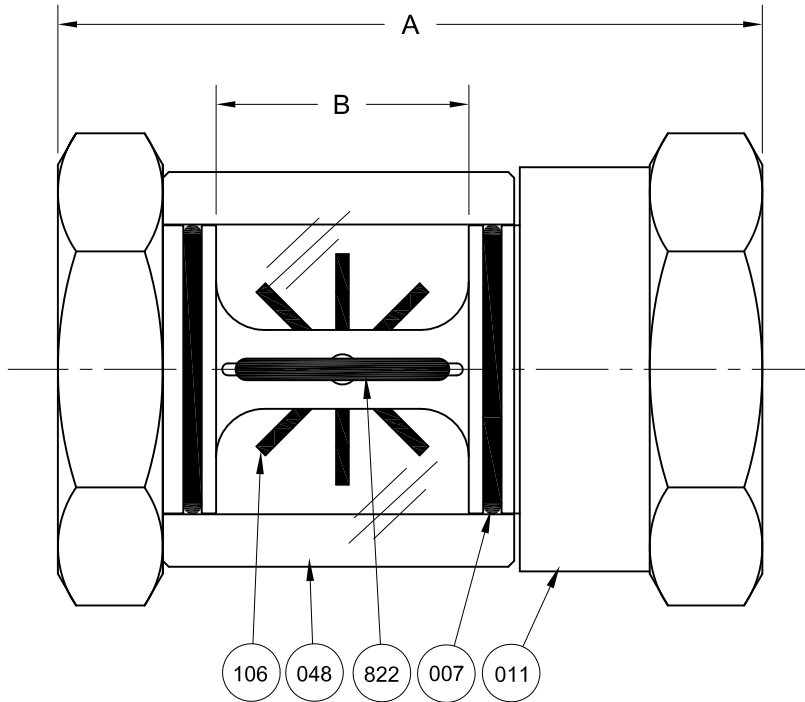

BILL OF MATERIALS					
No.	Name of Part	Qty.	Material	Max. Temp. (°F)	
Wetted	011	1	Nickel Plated Brass		
			316SS		
	007	Gasket	2	Fluoroelastomers	212
	048	Lens	1	Tempered Boro.	
	106	Rotor / Pin	1	Acetal / 416SS	
822	Wiper	2	Fluoroelastomers	212	

Max. Pressure: 230 PSIG
Max. Temperature: 212°F

PRODUCT SPECIFICATIONS										
FNPT Size	A		B		Weight		Minimum Flow to Move Rotor			
	In.	mm.	In.	mm.	lbs.	kg.	Water		Air	
							GPM	LPM	SCFM	LPM
1/4	2-3/4	70	7/8	22	0.7	0.3	0.1	0.4	1.1	31.2
3/8	2-3/4	70	7/8	22	0.7	0.3	0.1	0.4	1.1	31.2
1/2	3-11/16	94	1-1/4	32	1.9	0.9	0.3	1.0	2.0	56.6
3/4	3-11/16	94	1-1/4	32	1.9	0.9	0.3	1.1	2.0	56.6
1	4-7/8	124	1-7/8	48	3.9	1.8	0.5	1.9	4.0	113.3
1-1/4	4-7/8	124	1-7/8	48	3.9	1.8	0.8	3.0	5.0	141.6
1-1/2	4-7/8	124	1-7/8	48	3.9	1.8	1.0	3.8	5.0	141.6

Notes:

1. Not Recommended for Steam Service
2. BSPP, BSPT and Bi-Directional Options Available
3. No Replaceable Parts

JOHN C ERNST LLC.

www.JOHNERNST.com
21 Gail Ct. Sparta, N.J. USA

Series S17C Self Cleaning Sight Flow Indicator

Sheet: 1 of 1	Drawn By: WAS	Tolerances, unless otherwise noted Dec.: ±0.010" Frac.: ± Ang.: ±	Size: A
Scale: NTS	Approved By: JCW		
Dim.: Var.	Date: 07-FEB-17	Dwg. No.: SC2.0S17C.00.0.0	Rev.: --

S17C Series Configuration Choices:

Reference the Series S17C Model Number Matrix on our Website or Inquire with our Sales Team